
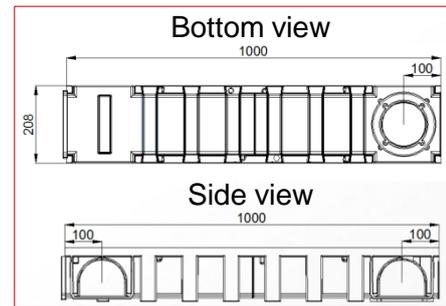
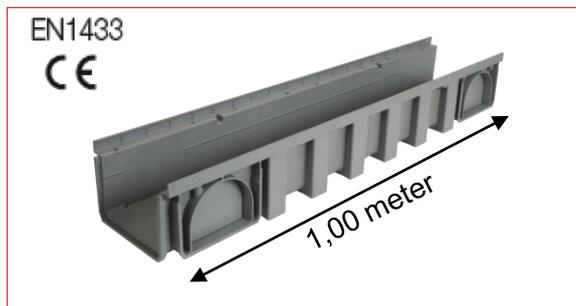


Connecto® I Channel – Outside width

200mm - light grey

Code : CAN188

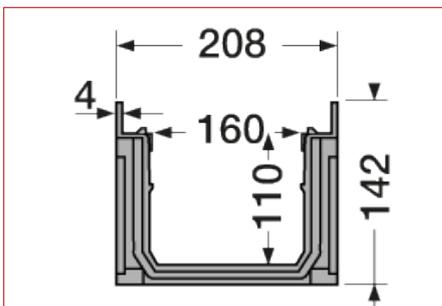

FUNCTION :

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking **CE**, it can be used in private areas for all building applications, the environment of home, pedestrian areas, private car parks or car parking decks in class **A15** or **B125**.

DESCRIPTION :

This channel body is injected in light grey polypropylene with male/female interlocking system. The gratings GRL88 (grey) and GRL88S (sand) and the cover TR88 (grey) are suitable with this channel.

ACCESSORIES :

The network connection can be realized thanks to the following PVC accessories :

- end cap/end or lateral outlet Ø100, 110 or 125 : NAT188, NAV188 or NAX188
- vertical outlet Ø100, 110 or 125 : STCAN, SVCAN or SXCAN
- sump unit with outlet Ø100 or 110 : PSCVT or PSCVV

CHARACTERISTICS :

Effective width: 160 mm
 Effective depth: 110 mm
 Hydraulic section: 176 cm²
 Weight: 1.8 kg



STCAN
SVCAN
SXCAN






NAT188
NAV188
NAX188



PSCVT
PSCVV

IMPLEMENTATION :

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite for class A15
3. See the scheme opposite for class B125

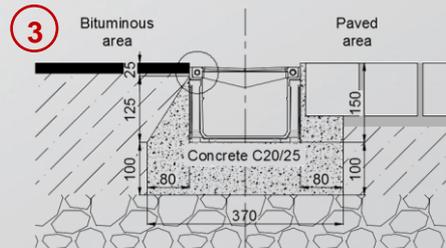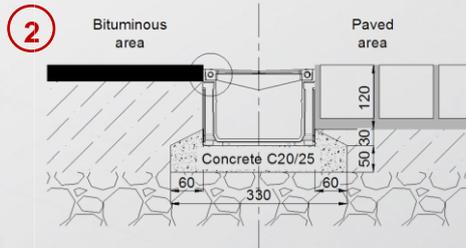

QUALITY - ENVIRONMENT :

ISO 9001
 ISO 14001
 BUREAU VERITAS
 Certification



DATE : July 2015