

INSTALLER'S GUIDE



BRACKETS AND METAL TRAYS




ADJUSTABLE UNIVERSAL PRE-ASSEMBLED AND NON WALL BRACKETS WITH HOOK SYSTEM.

Part No.	Dimensions WxHxL	Max. Load
S-310P	420x400x800mm	160kg
S-311P	465x400x800mm	160kg
S-313P	550x400x800mm	160kg

P = Preassembled

METAL TRAY FOR THE COLLECTION OF CONDENSATION WATER, SUPPLIED WITH 2 HANG SUPPORTS, Ø20 MM WATER OUTLET TO CONNECT DRAIN PIPE. SUITABLE TO ANY KIND OF BRACKETS IN METAL.

Part No.	Dimensions LxW
S-097-71	850x390mm
S-096-71 HEAVY DUTY	940x420mm

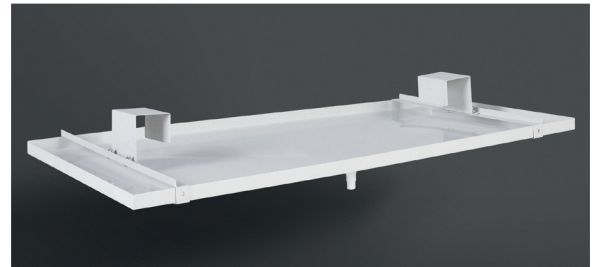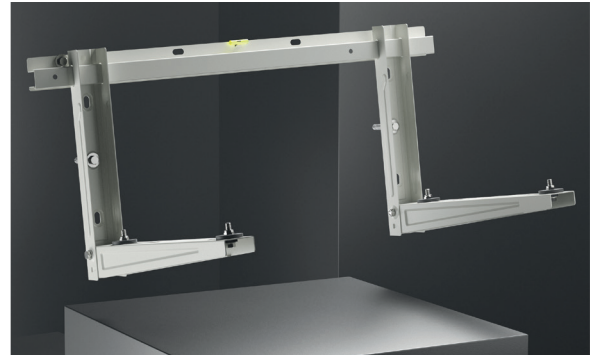


9898-037 Anti Vibration Dampers 100kg **GREEN**
9898-038 Anti Vibration Dampers 200kg **YELLOW**
9898-039 Anti Vibration Dampers 350kg **RED**
9898-040 Anti Vibration Dampers 450kg **BLACK**




9898-024 Vibration Dampers 40x20mm 50kg


DESIGN BOXES

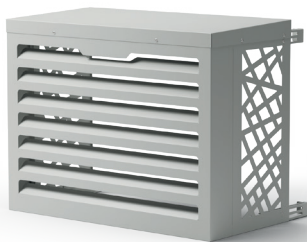

GIADA

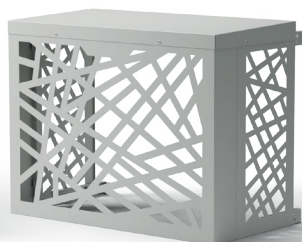

DIAMANTE

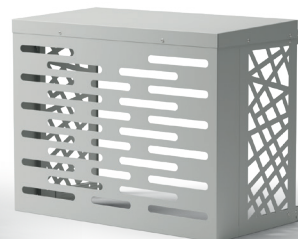

AMBRA



COLOUR COLOUR COLOUR




SCAN OR CLICK FOR MORE INFORMATION

AGATA PROTECTION BOX

This is a protection cage for outdoor units of air conditioners and heat pumps designed for easy installation and long-lasting durability. Thanks to the quick connection mode, it does not require additional screws for assembly. It is suitable for enclosing any type of outdoor unit due to the modularity of the panels and compatible with a wide range of AC and heat pumps brands on the market thanks to the variety of sizes.



COLOUR COLOUR COLOUR

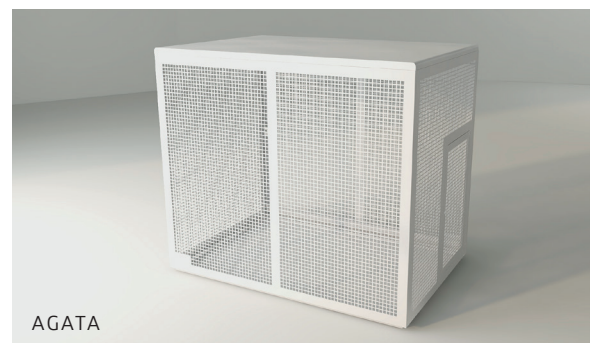

AGATA

INSTALLER'S GUIDE




BROOKLYN BASE

GROUND BASE MADE FROM SBR RECYCLED RUBBER AND ALUMINIUM STRUT.

Foot Only

41x21 mm	Feet Qty	Dimensions L x H x W mm	Max. load per foot
C-872	1	250x95x150	100kg
C-874	1	400x95x150	200kg
C-876	1	600x95x150	500kg
C-870	1	1000x95x150	500kg

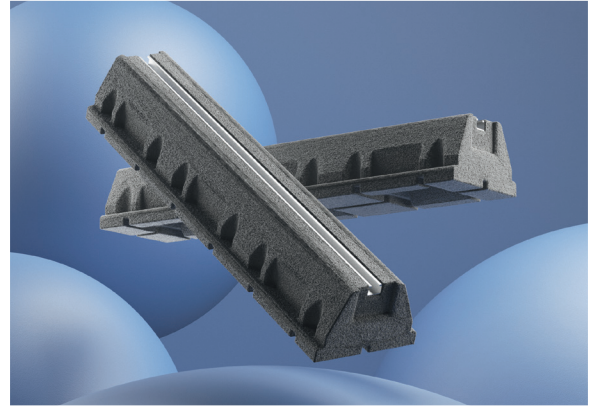


EURSPLIT

Better Fit, Better Performance

Effortless compatibility and performance. The well-known EuroPlusPro evolves into EuroSplit, a new trunking solution with enhanced performance and sleek design.

Size	Pure White	Signal White	Light Ivory	Anthracite Grey	Black
65 x 50	9841-002-08	9841-002-11	9841-002-15	-	-
70 x 55	9844-002-08	9844-002-11	9844-002-15	-	-
80 x 60	9855-002-08	9855-002-11	9855-002-15	9855-002-16	9855-107-95
90 x 65	9842-002-08	9842-002-11	9842-002-15	-	-
110 x 75	9846-002-08/2	9846-002-11	9846-002-15	-	-
125 x 75	9843-002-08/2	9843-002-11	9843-002-15	-	-

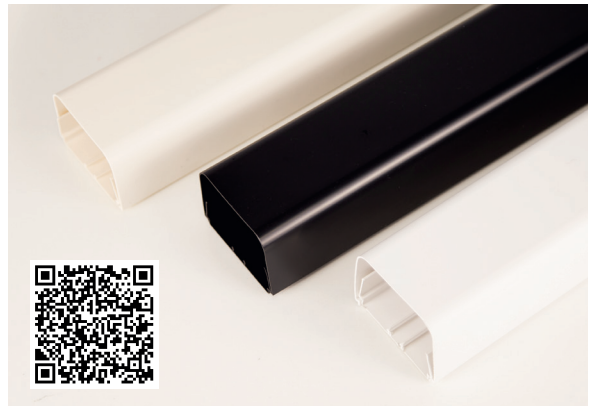

Reinforced Braided Vinyl Tubing

Flexible, durable and non toxic

Description	Part No.	Diameter (mm)		Colour	Length (m)	Pressure (bar) @20°C	Burst Pressure (bar) @20°C	Temp. Range
		ID	OD					
1/4" (6mm)	AX5100	6mm ID	12mm OD	Clear	Length 30mm	12	36	Temp. -5°C - 65°C
3/8" (10mm)	AX5101	10	14					
1/2" (12mm)	AX5102	16	22					
5/8" (15mm)	AX5103	15	20					
1/4" (6mm)	AX5110	6	12	Black	Length 30mm	12	36	
3/8" (10mm)	AX5111	10	14					
1/2" (12mm)	AX5112	16	22					
5/8" (15mm)	AX5113	15	20					

